




SuperVac *Super* Updraft™

3 Cubic Yard Low Profile Parking Area Sweeper

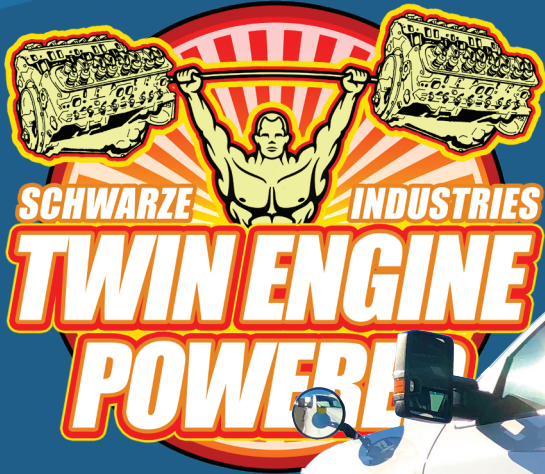

Large
3 CUBIC YARD
Capacity



MADE IN THE USA

*Sweeper shown with optional equipment


- Low Profile
- Vertical Digger Broom
- WhisperWheel Fan Technology
- Full Size Sweeping Head

- Stainless Steel Welded Construction
- Large Water Capacity
- All LED Lighting
- Optional Curb Blower Available

800.879.7933

www.schwarze.com

SuperVac Super Updraft

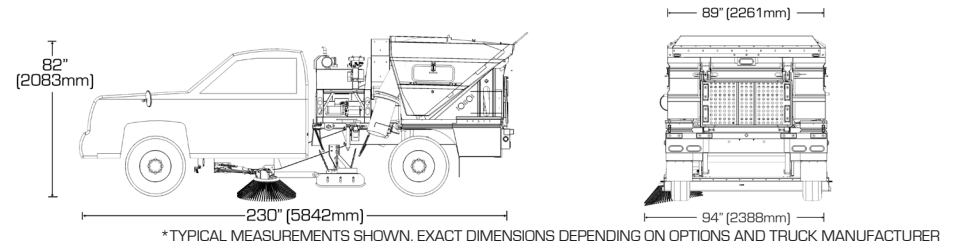

GENERAL SPECIFICATIONS:

Wheelbase	133 in (3378 mm)
Sweeping width	81 in (2057 mm)
With one gutter broom option	94 in (2388 mm)
Turning radius	274 in (6960 mm)
Overall length	230 in (5842 mm)
Overall height (without beacon)	82 in (2083 mm)
Overall width	89 in (2261 mm)

AUXILIARY ENGINE:

Manufacturer	B&G Vanguard Big Block
Horse power	25
Type	Air cooled gasoline
Air cleaner	Centrifugal multi-stage
Cylinder	Cast iron cylinder sleeve
Warranty	3 year

DEBRIS HOPPER:

Volumetric capacity	3.0 cu yd (2.3 cu m)
Dumping	Hydraulic high dump
Material	Stainless steel
Dump height	69 in (1753 mm)
Dumping tilt angle	88°
Inspection doors	1 on left side 1 on right side
Controls	Electric; in-cab
Paint	Imron Elite®

ELECTRICAL SYSTEM:

Battery	1 @ 12 V, 750 cca each
Controls	Electric; in-cab
Circuit protection	Resettable circuit breakers
Rear view camera	Color; dash mounted

FAN SYSTEM:

Type	Whisper wheel turbine
Drive	Belt driven
Number of blades	10
Diameter	24 in (610 mm)
Construction	Welded abrasion-resistant steel
Housing liner	Bolt-in corded rubber
Mounting	Pillow block bearings
Vacuum enhancer	For heavy/light material

PICKUP HEAD:

Type	Debris-moving blast and suction
Operating direction	Forward and reverse
Suspension	2 trailing arms; 4 springs balanced
Length	80 in (2032 mm)
Pressure hose diameter	10 in (254 mm)
Suction hose diameter	10 in (254 mm)
Flap design	3 flaps
Controls	Hydraulic raise and lower
Skids	Tungsten carbide

OPTIONAL WATER SYSTEM:

Type	Diaphragm
Tank capacity	25 gal (96 l)
Construction	Polyethylene
Pump	Electric 12 V dc
Controls	Electric; in-cab
Filter	100 mesh screen
Mounting	Removable
Fill diameter	3 in (76.2 mm)
Nozzles	2 on broom; 2 inside hopper
Optional	Front spray bar

SIDE BROOM:

Type	Vertical digger
Bristle	Wire or poly
Diameter	26 in (660 mm)
Drive	Hydraulic torque motor
Speed	Variable
Mounting	Trailing arm design
Location	Left hand side
Suspension	Free floating
Wear adjustment	Automatic
Impact protection	Spring
Tilt angle adjustment	Manual; at broom

HYDRAULIC SYSTEM:

Type	Belt driven gear pump
Fluid capacity	3 gal (11.4 l)
Purpose	Power gutter broom
Dump system hydraulics	12 V power unit, 1 gal (3.8 l)

OPTIONAL EQUIPMENT:

Polyethylene tool box
Rear trash bag rack
Cab mounted strobe
Extra flood light
Curb blower.

Note: design and specifications subject to change without notice.



Schwarze parking lot sweepers are guaranteed to be free from defects due to faulty materials and/or workmanship for a period of 12 months, or 1200 hours. Liability is limited to replacement or repair of defective part(s) at factory or authorized dealer. The standard warranties of the chassis and auxiliary engine manufacturer shall apply.

Also Available from Schwarze Industries, Inc:



Affiliates:



A FAMILY COMPANY SINCE 1967

Bortek
INDUSTRIES, INC.

WE KNOW CLEAN

800.626.7835 BORTEKINDUSTRIES.COM



© Schwarze Industries 2018
1055 Jordan Road
Huntsville, AL 35811
800.879.7933
An Alamo-Group Company

